

## RESEARCH OUTPUTS / RÉSULTATS DE RECHERCHE

### **Dry plasma treatment of organometallic precursor for the synthesis of fuel cells catalyst material**

Da Silva Pires, Mathieu; Busby, Yan; Haye, Emile; Job, Nathalie; Pireaux, Jean-Jacques; Houssiau, Laurent

*Publication date:*  
2018

*Document Version*  
Publisher's PDF, also known as Version of record

[Link to publication](#)

*Citation for published version (HARVARD):*

Da Silva Pires, M, Busby, Y, Haye, E, Job, N, Pireaux, J-J & Houssiau, L 2018, 'Dry plasma treatment of organometallic precursor for the synthesis of fuel cells catalyst material', ACIN 2018, Namur, Belgium, 16/07/18 - 20/07/18.

#### **General rights**

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal ?

#### **Take down policy**

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.



## INTRODUCTION


A strong limitation to the commercialization of Proton Exchange Membrane Fuel Cells (PEMFC) is the cost and durability of the nanocomposite catalyst material which relies mainly on rare noble metals, such as Platinum. By depositing bimetallic Pt-Ni nanoparticles (NPs) on a high surface area carbon substrate, we could increase the activity of Pt-Ni/C respect to conventional Pt/C [1].

Moreover, this work explores the synthesis of Pt-Ni/C composites by a novel methodology based on low-pressure plasma treatments [2-3].

Ni-NPs and Pt-Ni NPs with controlled chemical composition, structure and morphology were obtained by plasma processing and characterized by X-Ray photoelectron spectroscopy (XPS), X-Ray diffraction (XRD) and transmission electron microscopy (TEM).

The simultaneous C surface functionalization (addition of N-groups) was obtained with N-containing plasma treatments.


## How to synthesize the NPs : plasma methodology

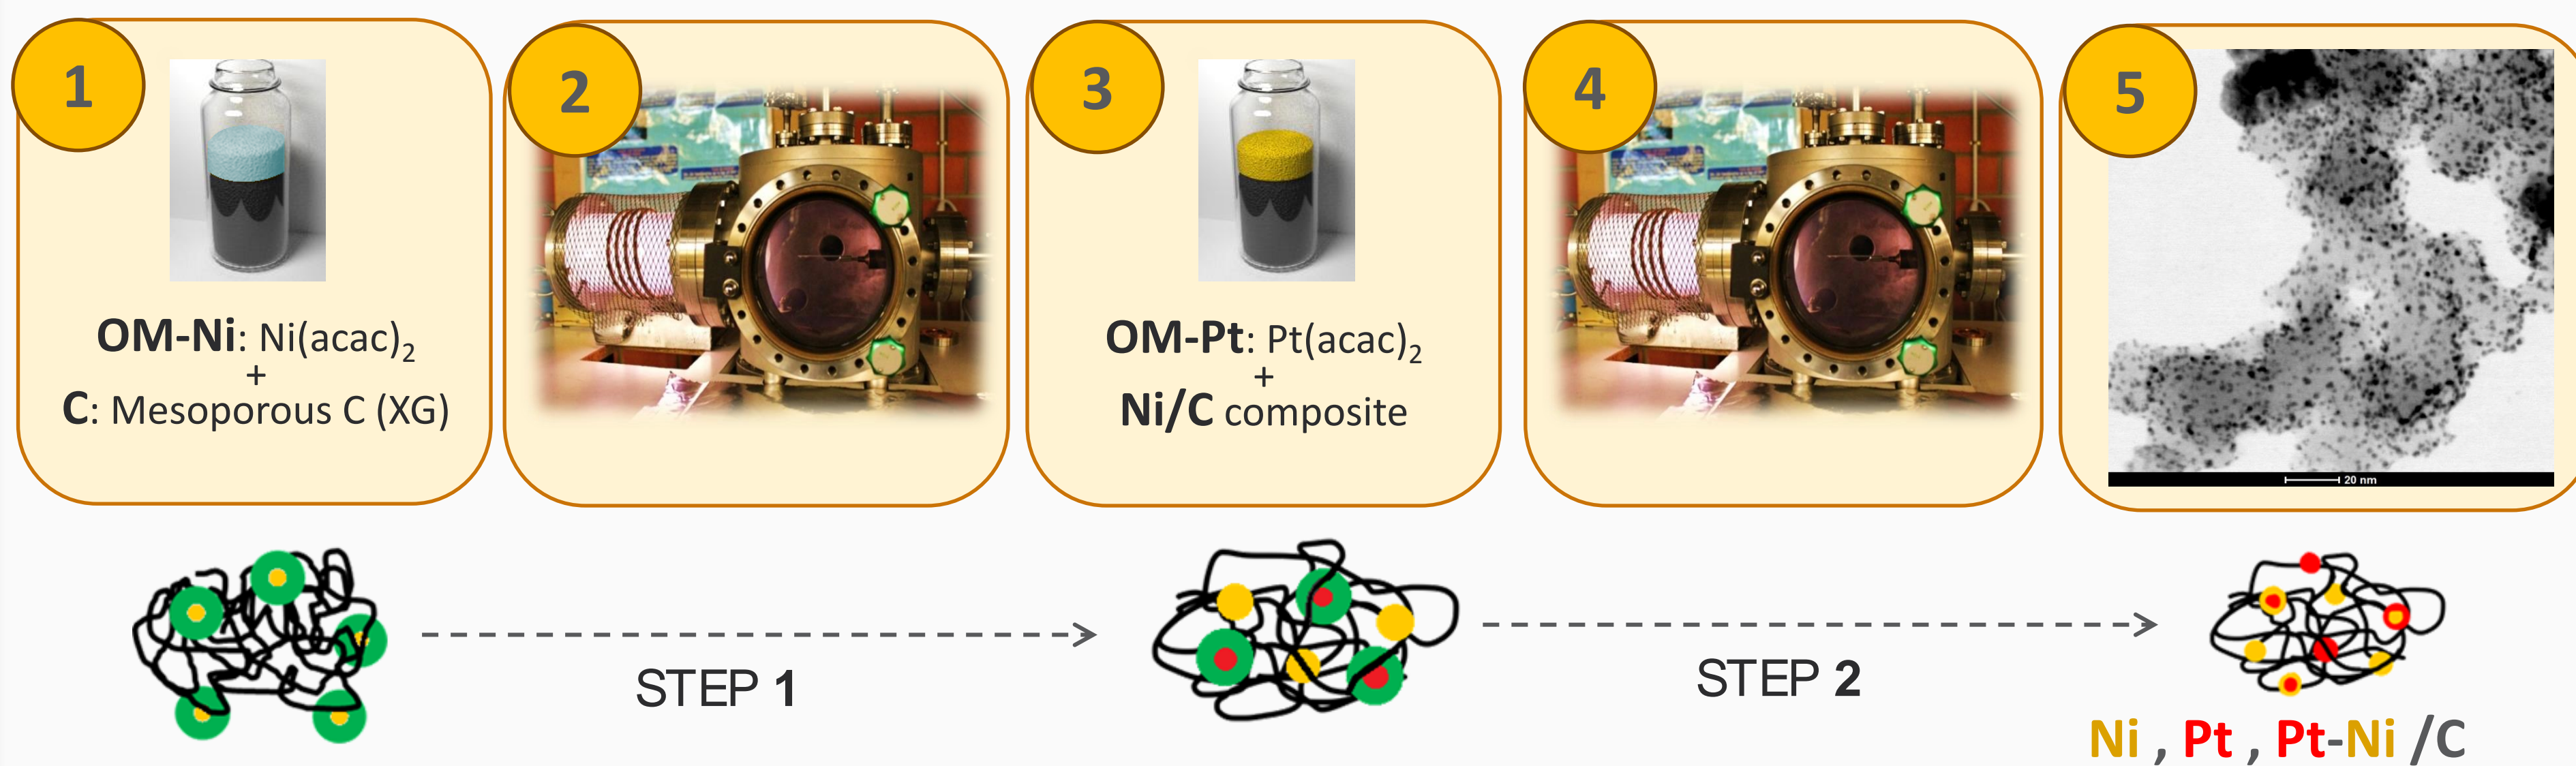

### EXPERIMENTAL PARAMETERS

RF Power, Treatment time, Plasma chemistry (Ar, N<sub>2</sub>, NH<sub>3</sub>, etc.), Organometallic (OM) precursors

## Functionalization of the mesoporous C substrate – HR-XPS Spectra of C1s and N1s

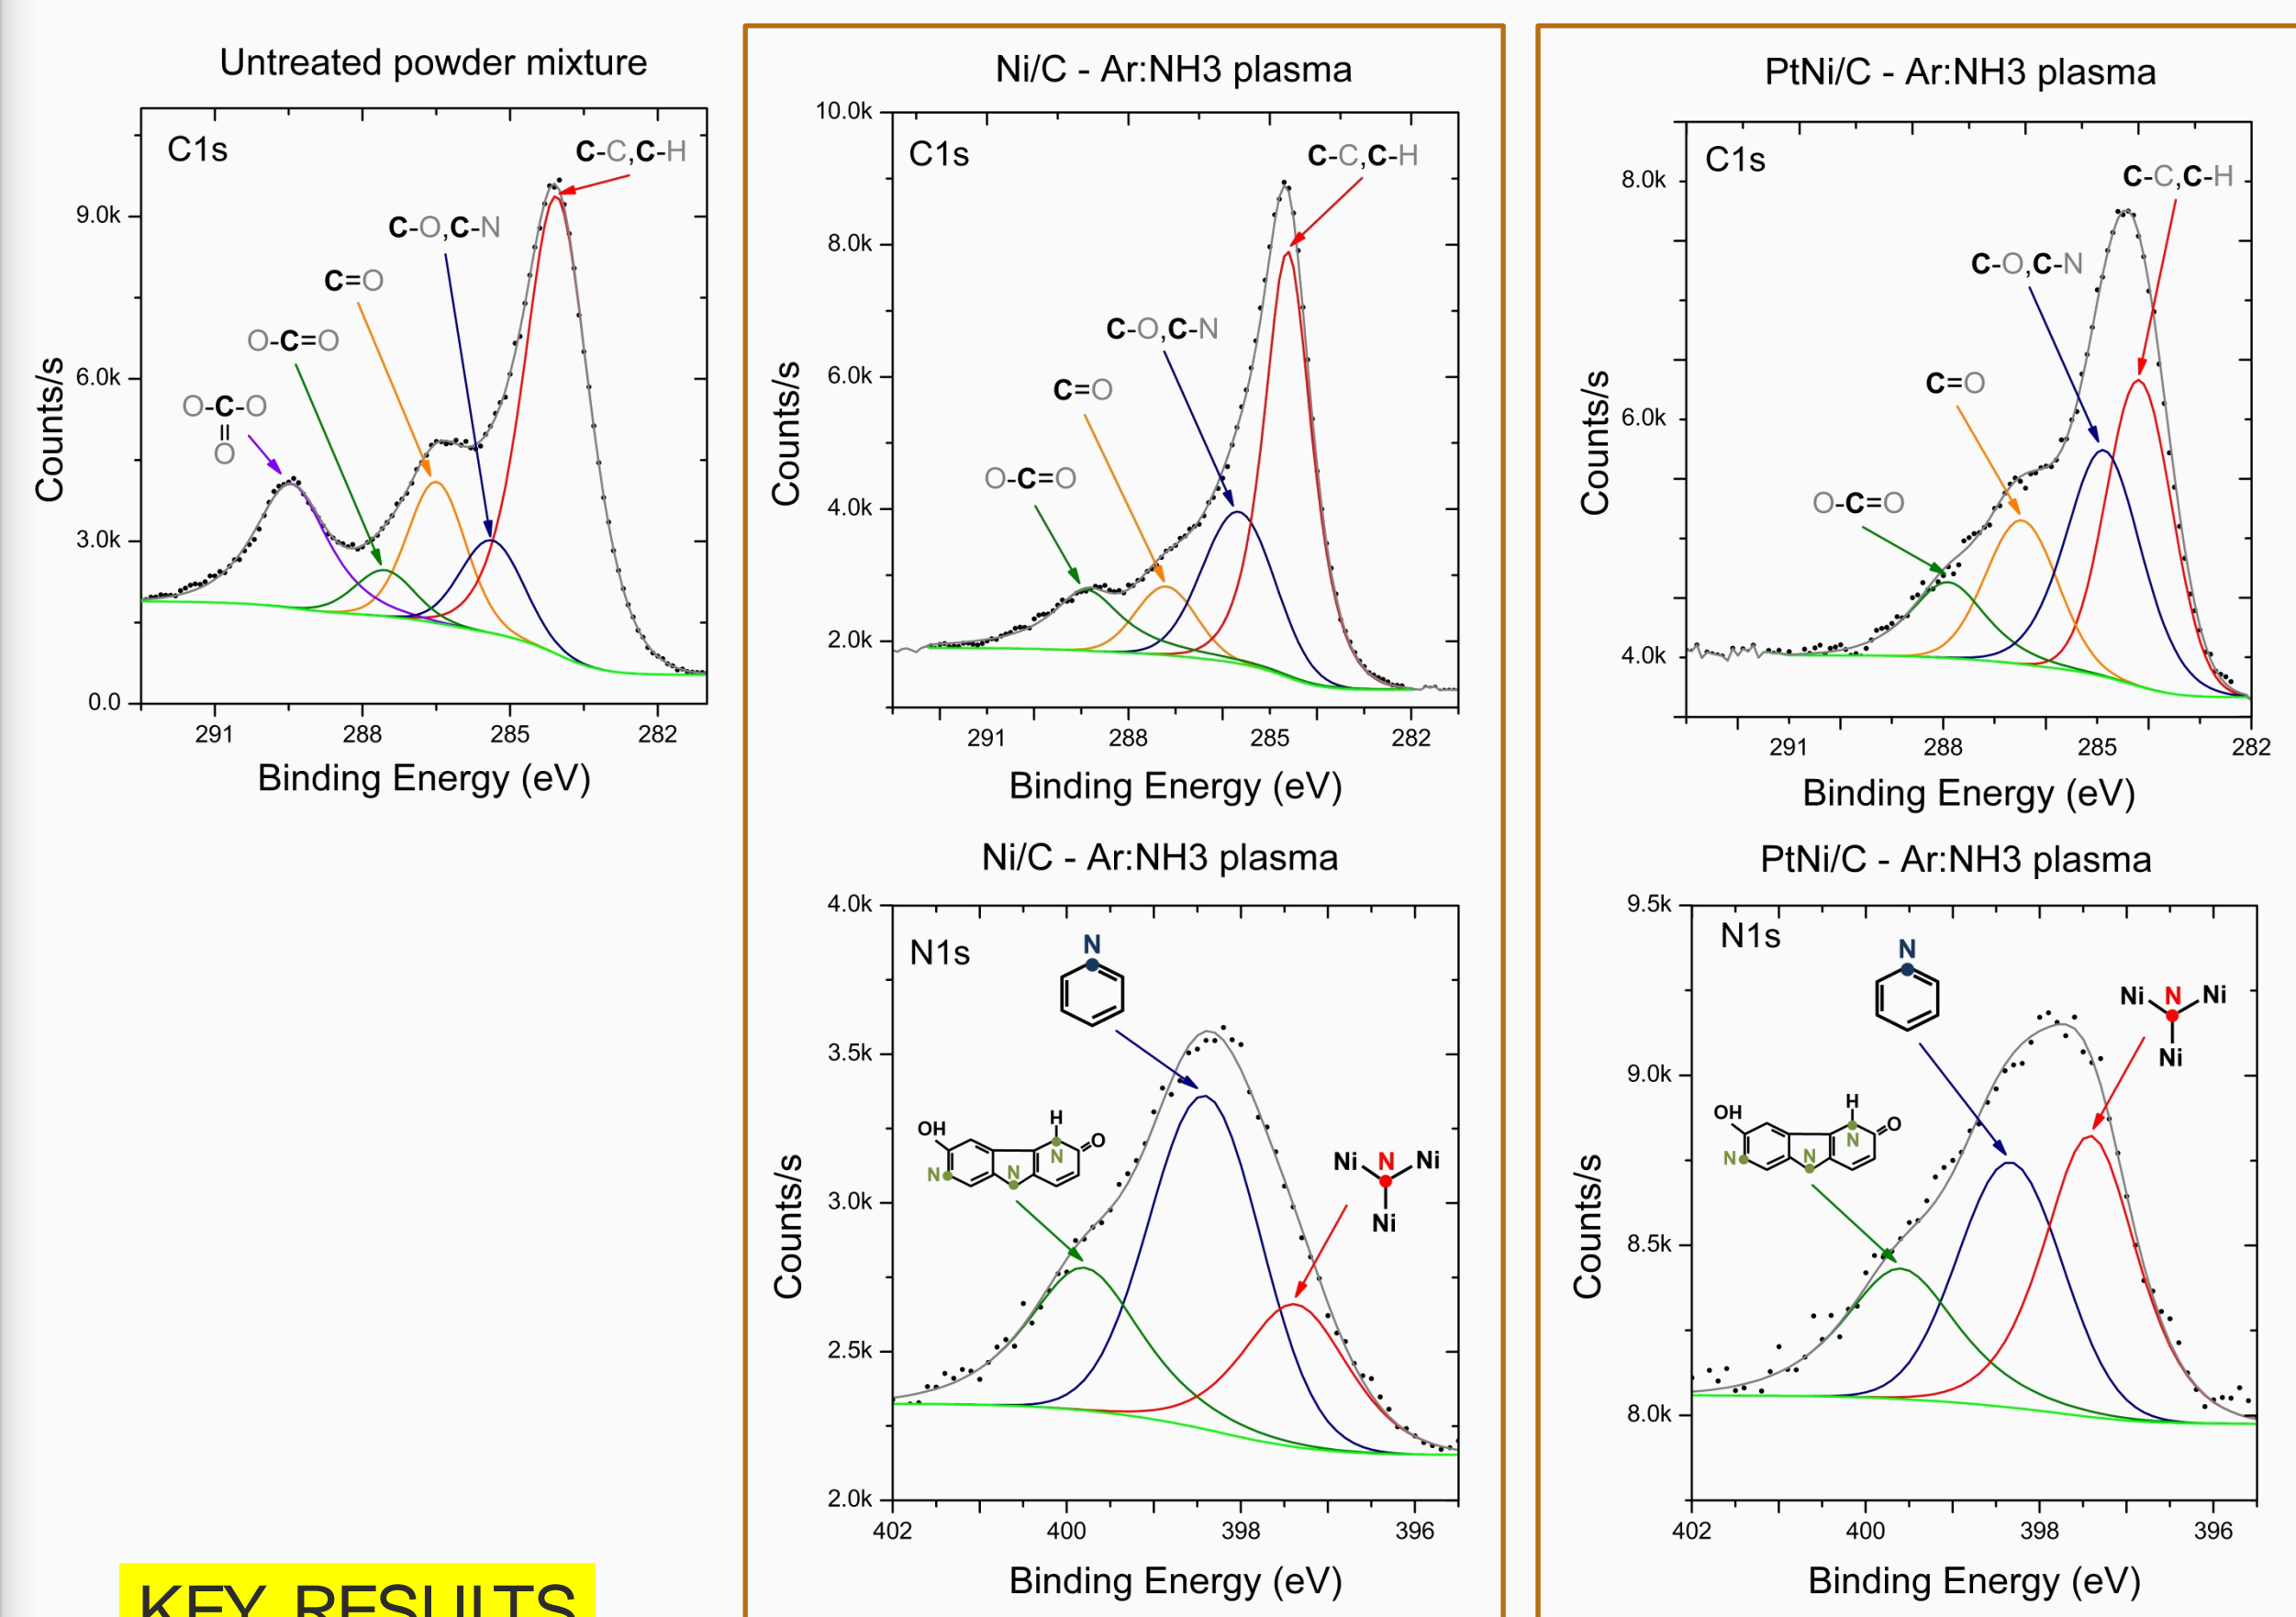

### KEY RESULTS

- (1) NH<sub>3</sub> plasma leads to the incorporation of N functional groups in the mesoporous carbon substrate.
- (2) The at% of nickel nitride component in the N 1s spectrum increases with Ar:NH<sub>3</sub> plasma treatment time.

### Plasma conditions

STEP 1:

OM-Ni + C

Ar:NH<sub>3</sub> / 100W / 60 min

Ar:NH<sub>3</sub> / 140W / 90 min

STEP 2:


OM-Pt + Ni/C

Ar:NH<sub>3</sub> / 120W pulsed / 120 min

Ar:NH<sub>3</sub> / 100W / 75 min

Ar:NH<sub>3</sub> / 140W / 5 min


## Is our sample a good catalyst candidate ? STEM with EDX analysis

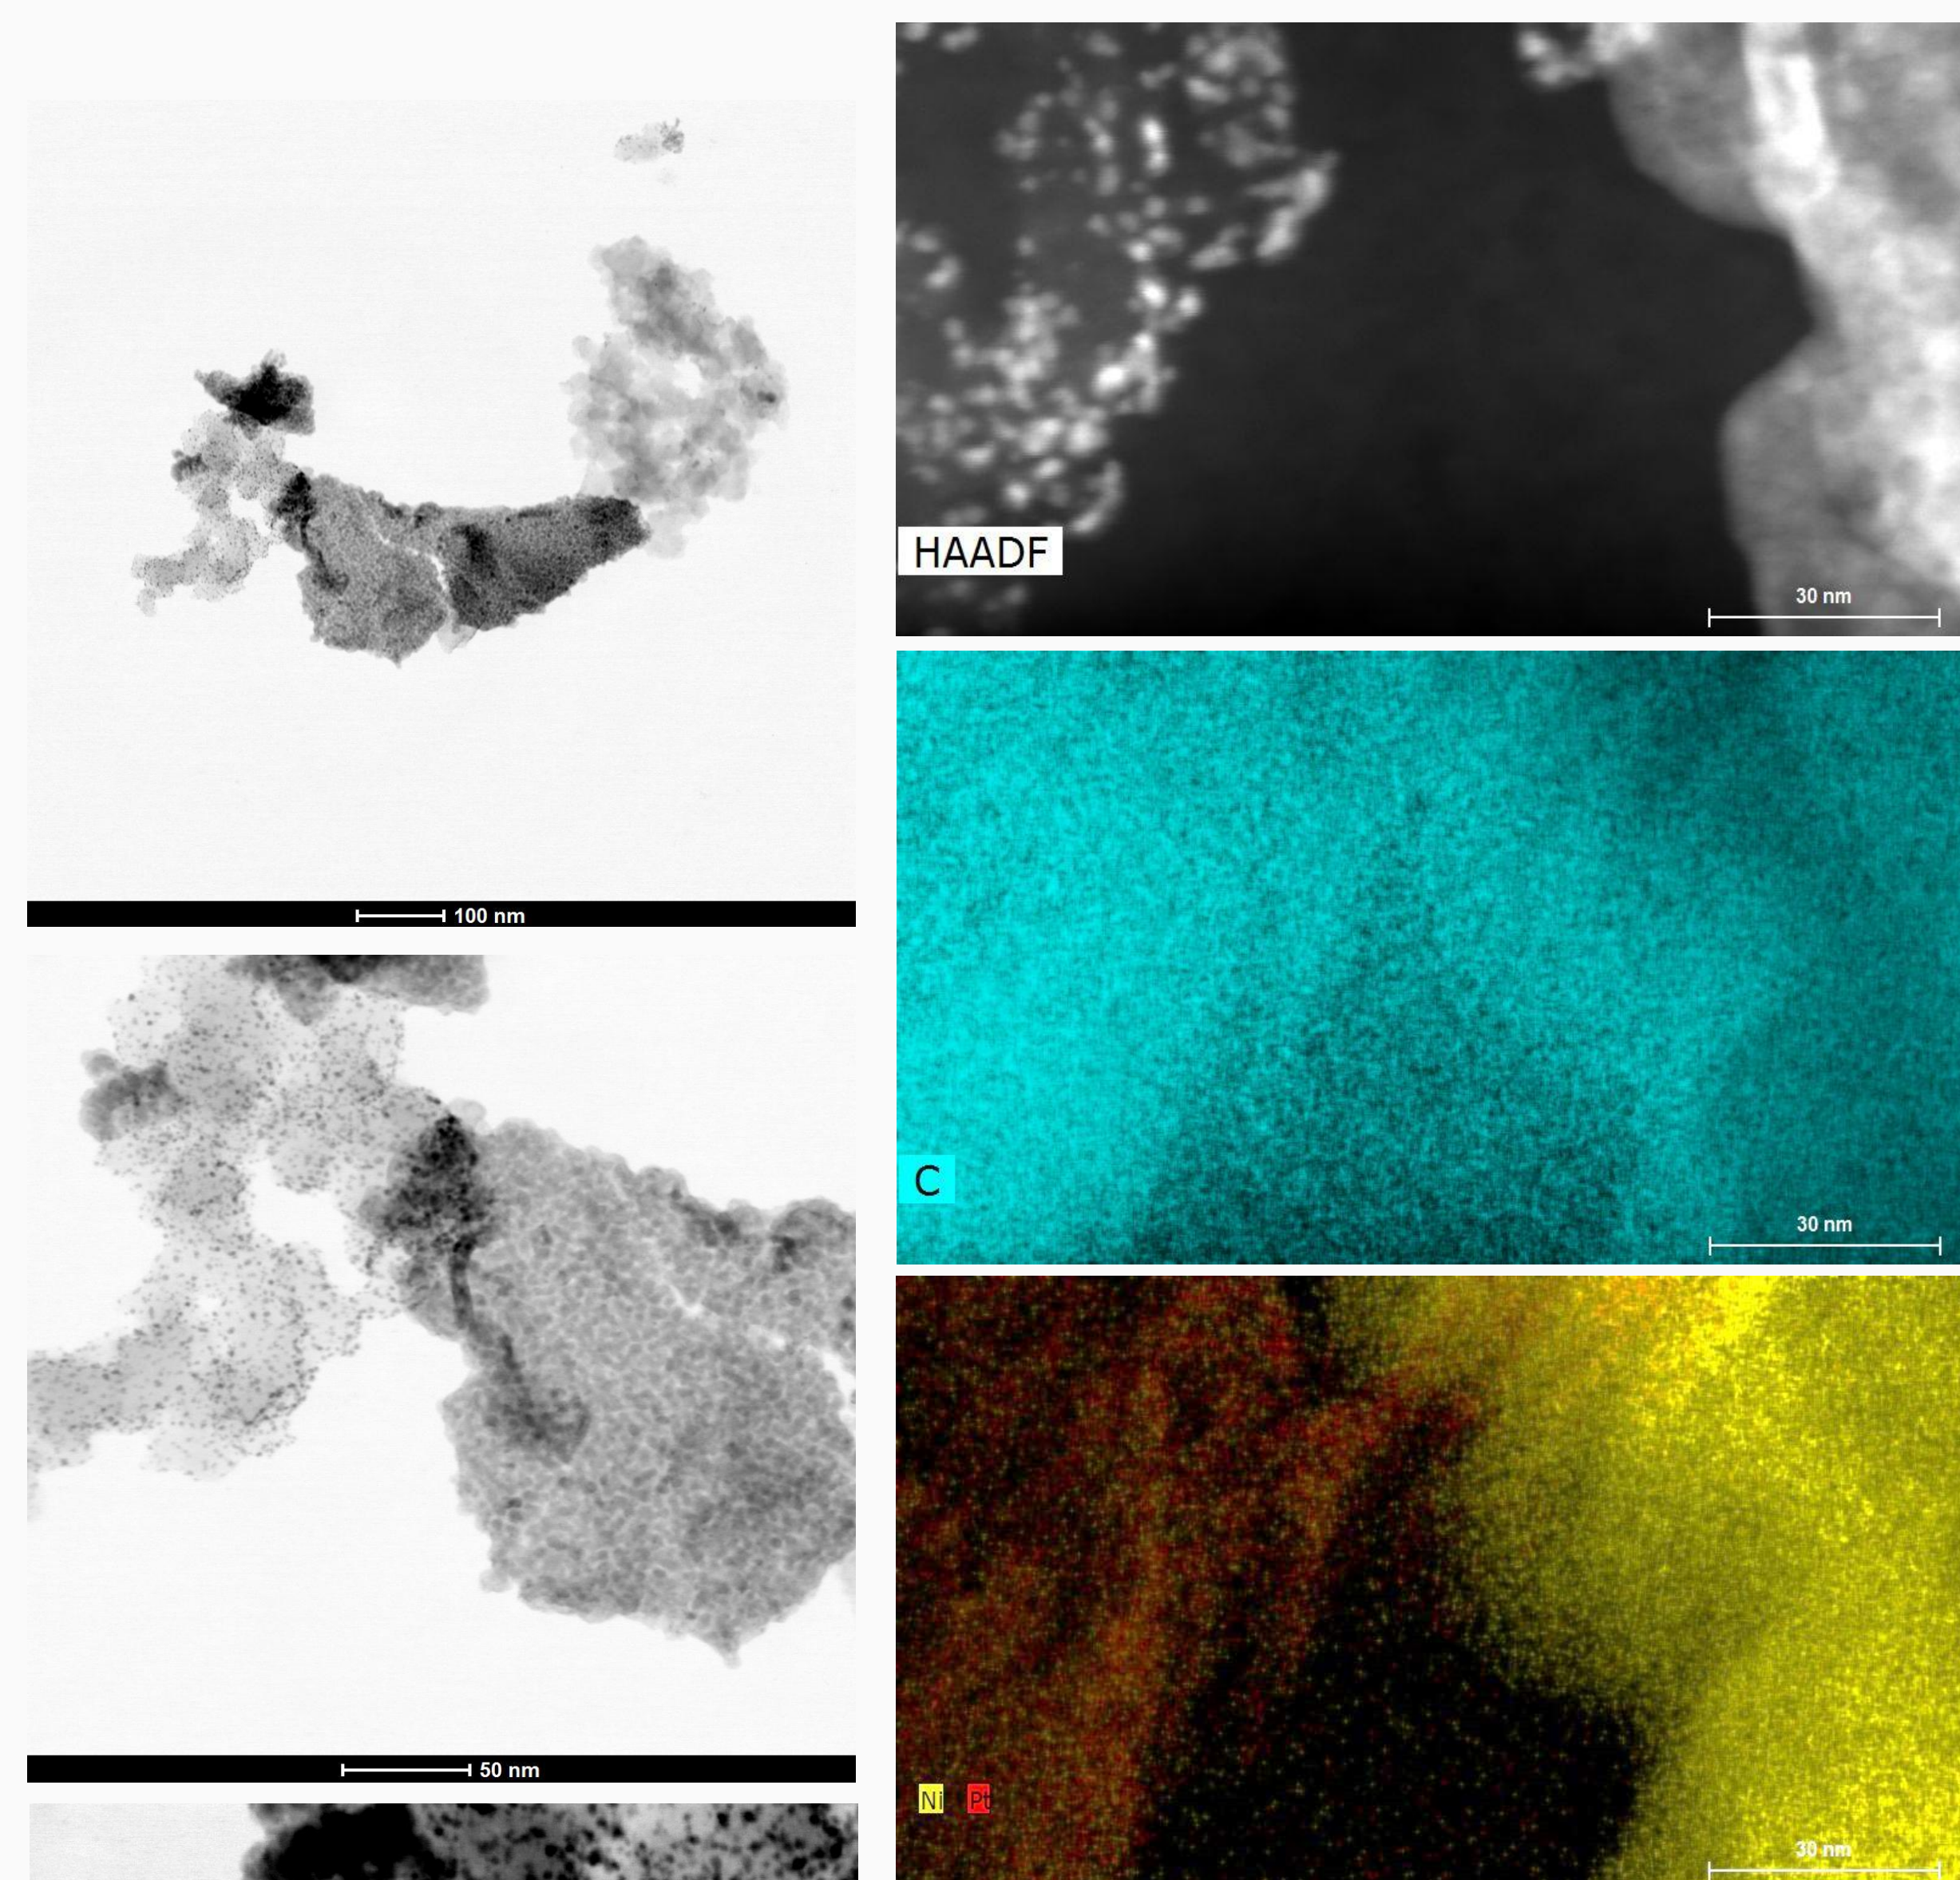

### KEY RESULTS

- (1) STEM images show Ni and Pt NPs with a size distribution of 3-5 nm.
- (2) The optimized plasma treatment conditions allow the formation of Ni and Pt and Pt-Ni NPs (EDX analysis).


## Chemical compositions of Pt-Ni/C nanocomposites : HR-XPS

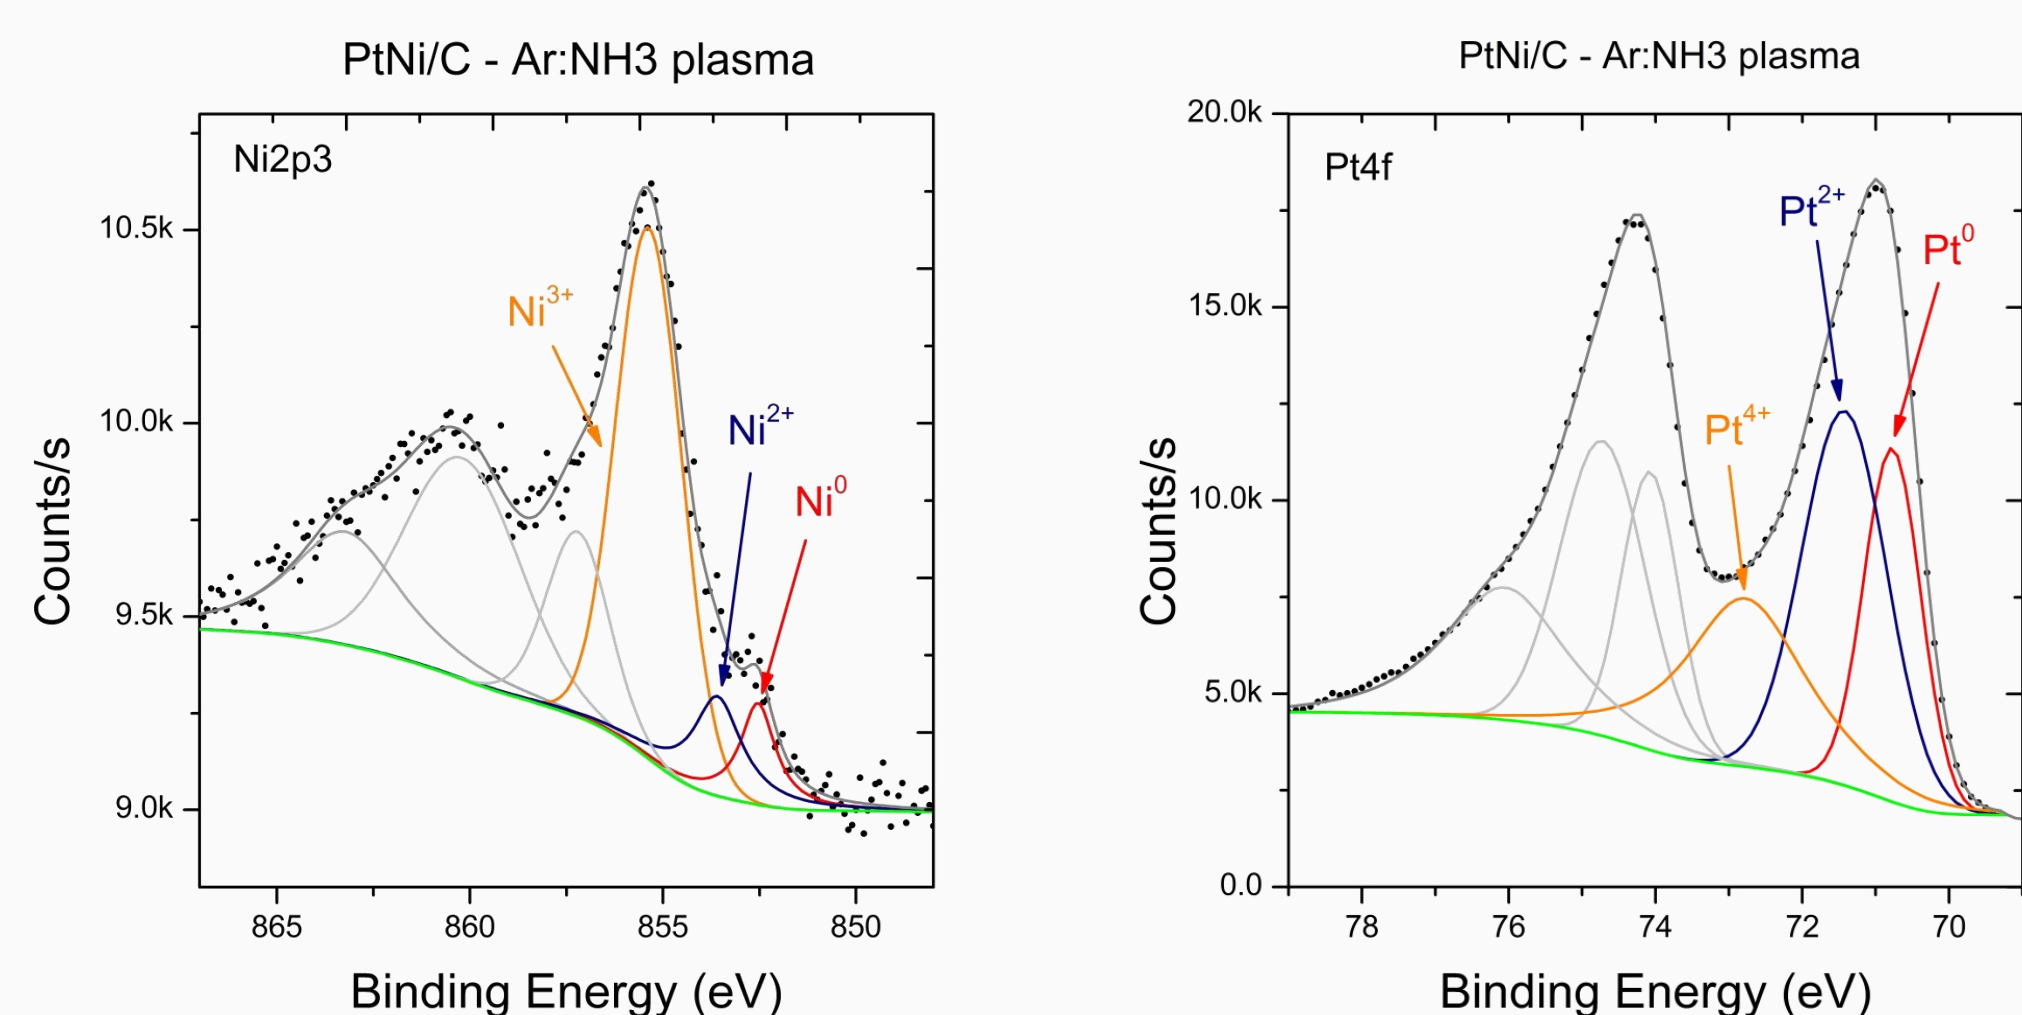

### KEY RESULTS

- (1) **Composition analysis**  
For a starting mixture of 37 wt% of Pt and 20 wt% of Ni:  
Pt~9 at% and Ni~2 at%
- (2) **Chemical analysis**  
Pt<sup>0</sup>~30-35% of Pt  
Ni<sup>0</sup>~10% of Ni

## Is the OM precursor still present ? XRD analysis

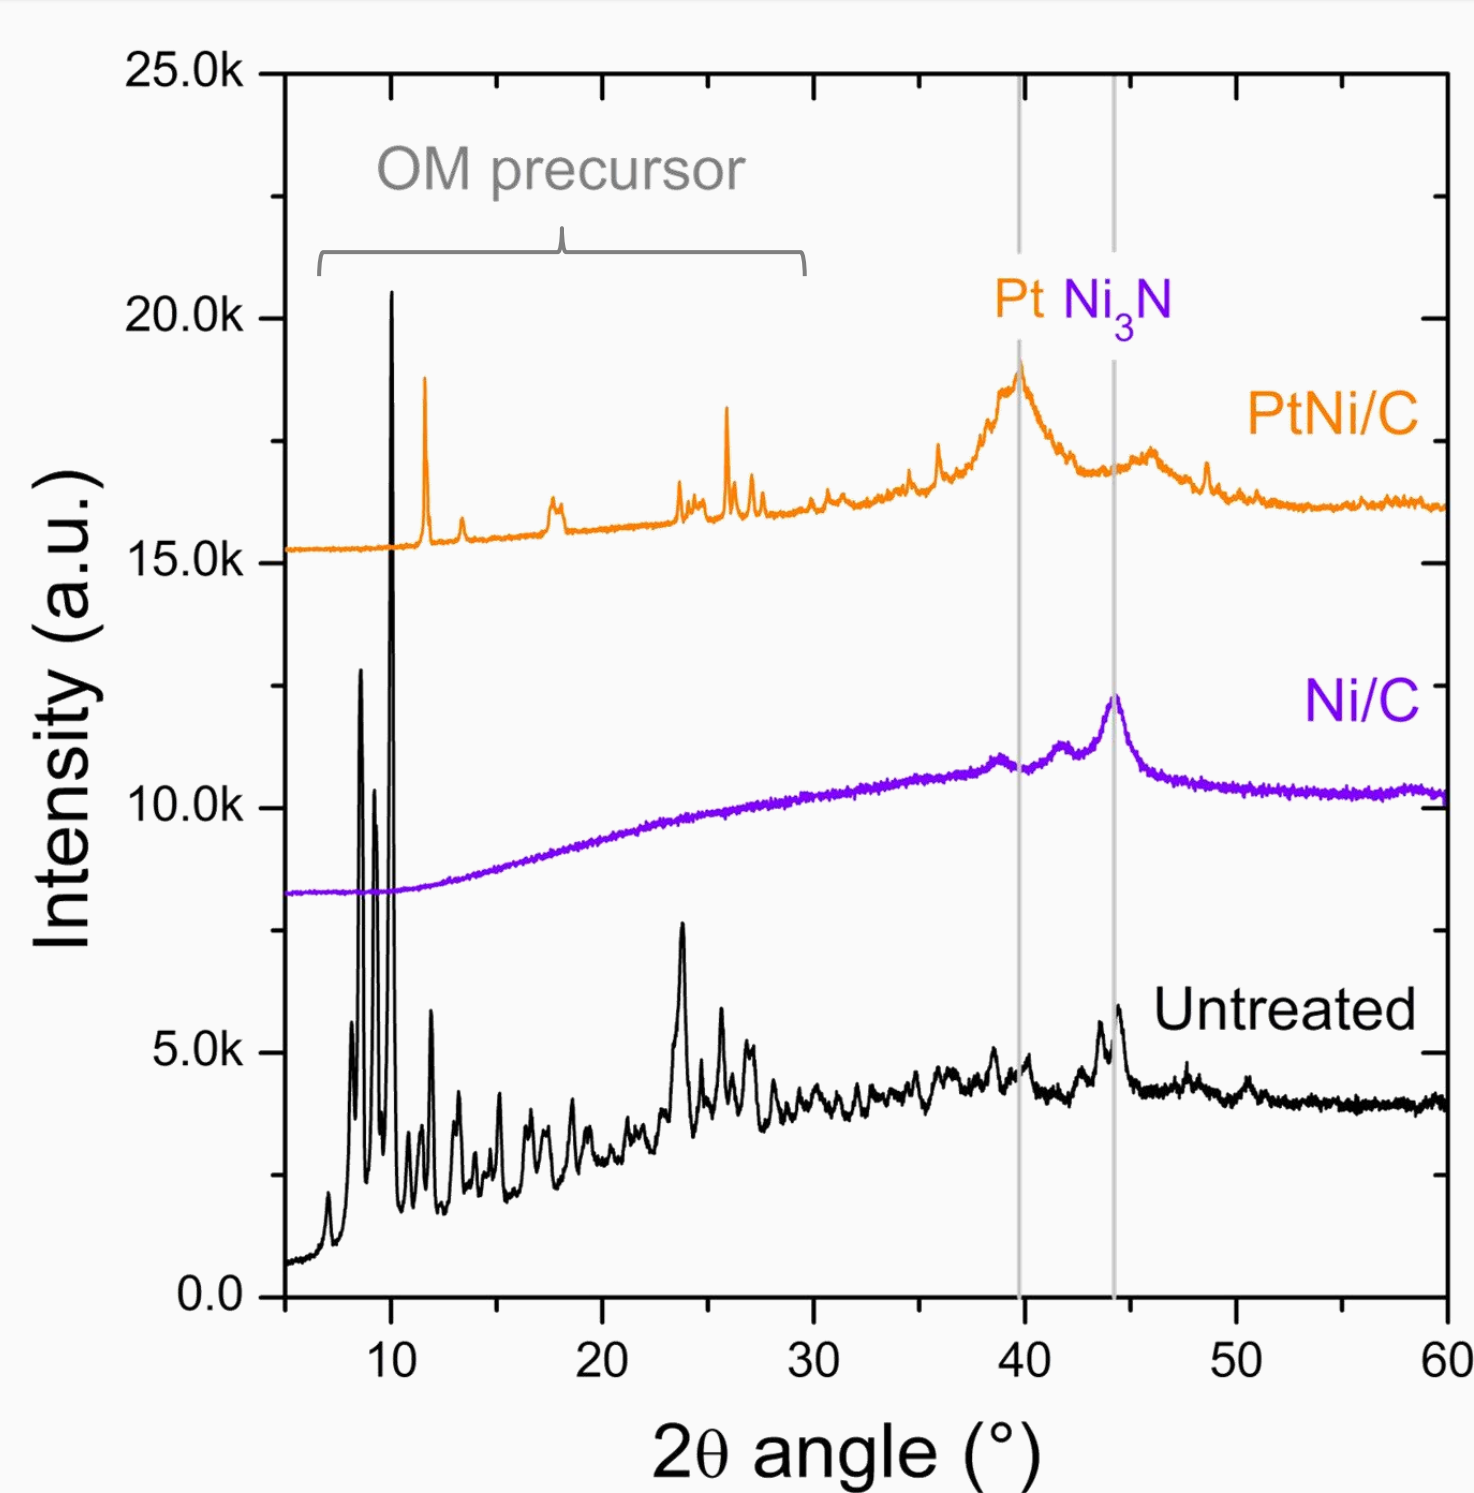

### KEY RESULTS

- (1) The untreated powder mixture shows peaks attributed to the OM precursor.
- (2) STEP 1: full degradation of the Ni OM and formation of nickel nitride.
- (3) STEP 2: the final catalyst shows strong peaks of Pt-NPs masking the weaker Ni-NPs reflections.
- (4) The FWHM of Pt reflections confirms the NPs size ~ 3-5 nm. (Scherrer formula)

## CONCLUSION

Results validate our plasma methodology to synthesize Pt-Ni/C composites. NH<sub>3</sub> plasma are efficient to fully degrade the Ni and Pt OM precursors and allow to control the chemical composition of our catalysts.

Catalytic activity tests are ongoing and will allow comparing the catalyst activity with commercial Pt/C catalysts. Further studies will be directed to improve our methodology in order to make Pt-Ni alloys by varying the OM precursors or by developing a one-step process.

## REFERENCES

- [1] Brault, P., *Plasma Processes and Polymers*, 13, (2016) 10-18
- [2] M. Laurent-Brocq, N. Job, D. Eskenazi, J.-J. Pireaux, *Applied Catalysis B: Environmental*, 147, (2014) 453-463
- [3] E. Haye, Y. Busby, M. da Silva Pires, F. Bocchese, N. Job, L. Houssiau, J.-J. Pireaux., *ACS Appl. Nano Mater.*, 1, (2018) 265-273